


Section 8 – Single Leds and Discs

1. LEDs – 5 mm (Brightest in Australasia)

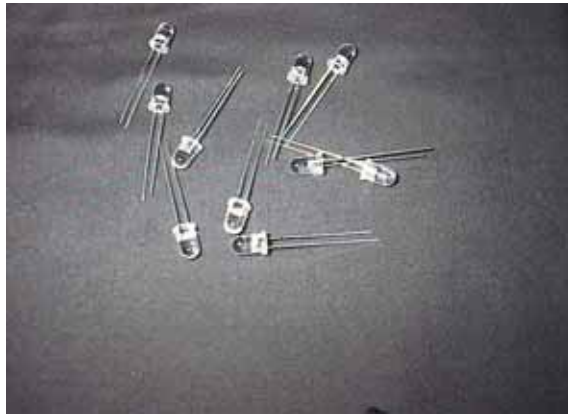

Code	Colour	Angle	Bin	mcd
BUL5 LEHR 508T	RED	15 DEG	Q	7,500
BUL5 LEHR 515T	RED	30 DEG	Q	7,500
BUL5 LEHR 530T	RED	60 DEG	P	6,000
BUL5 LEYY 508T	AMBER	15 DEG	Q	7,500
BUL5 LEYY 515T	AMBER	30 DEG	R	10,000
BUL5 LEYY 530T	AMBER	60 DEG	P	6,000
BUL5 LEYY 540T	AMBER	80 DEG	L	2,200
BUL5 LEWW 515	WHITE	30 DEG	O	4,500
BUL5 LEWW 530	WHITE	60 DEG	N	3,600

All whites are Bin C (K3500-K4500) unless otherwise requested

BUL5 LEBB 515	BLUE	30 DEG	P	6,000
BUL5 LEBB 53A	BLUE	60 DEG	L	2,200
BUL5 LEBB 555	BLUE	110 DEG	L	2,200
BUL5 LEPG 515	GREEN	30 DEG	S	13,000
BUL5 LEPG 530	GREEN	60 DEG	R	10,000

High brightness flush uplight

LOTUS DISC 32



Lotus disc SS 32

DESCRIPTION

The light was initially developed for an uplight for an outdoor shower. Since then it has found use in pools for steps, for motor homes, drive over light and driveway lights

APPLICATIONS

As a totally waterproof light operating off a very small power consumption it will find use in a large area of applications from gardens to pools, wet areas, steps, outdoor living, motor homes campervans and homes etc.

DIMENSIONS

The top flange is 40mm diameter by 1mm thick and the lower portion is 32mm diameter by 22-25mm deep. It is designed to fit into 40mm conduit. .

TECHNICAL


12-15 Volt DC. power consumption a minimal 9.6 watts at 80 milliamps.

OPTIONS

Available in all standard Led colours of white, red, amber, yellow, blue and green. Operating voltage can be made to suit. Flange may be round or square.



DISC LIGHTS – STANDARD CLUSTERS

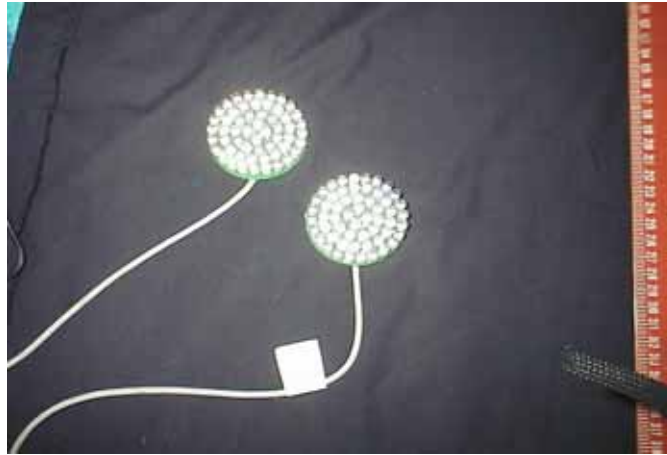

Smartlite Leds has a range of standard disc lights and can manufacture to suit client specifications.

These discs can be epoxied for waterproofing if required.

Colours available are white, blue, red, amber and green.

Talk to us about your requirements.